

Liquid Coffee Ambient Dispenser

Features

Liquid Coffee Ambient Dispenser

- Attractive appearance and narrow 12" (30.5 cm) width.
- Dispense over 125 - 5 oz. (148 ml) cups per hour with a 120 volt, 15 amp electrical connection or over 500 - 5 oz. (148 ml) cups per hour with a 240 volt / 30 amp electrical connection.
- Uses ½ gallon (1.9 litre) and most 1 gallon (3.8 litre) bag-in-box (BIB) containers.
- Insulated product cabinet assures maximum product life.
- Refill or rinse LED lights alert the operator for concentrate or cleaning.
- Global multi-volt design is easily converted to ratings from 100 to 240 volts (50-60 hertz) eliminating the need to inventory multiple electrical configurations.
- FlavorGard® technology continuously monitors extract-to-water ratio and assures flavor consistency.
- Easy-to-program one touch portion control model available.



LCA-2

Dimensions: 30" H x 12.2" W x 24.9" D
(76.2 cm H x 31 cm W x 63.3 cm D)



LCA-2, PC

LCA is also available with portion control

For current specification sheets and other information, go to www.bunn.com.

Related Products

Easy Clear® EQHP-10
Product No. : 39000.0004




Easy Clear® EQHP-10L
Product No. : 39000.0001

Easy Clear® EQHP-25
Product No. : 39000.0005


Easy Clear® EQHP-25L
Product No. : 39000.0002



1/8" Replacement tube kits
Product No. : 34728.1000



3/16" Replacement tube kits
Product No. : 34727.1000



Scholle BIB connector
Product No. : 35057.0000



LiquiBox QC/D II BIB connector
Product No. : 35055.0000

50ml Graduated Cylinder Kit
Product No. : 34843.1000
For use in calibration of pumps.



Model

LCA-2

Agency Listing



Dimensions & Specifications

Model	Product Number	Dispense Rate/Sec.		Connector Type	Volts	Amps	Heater Watts	Capacity**	Cubic Feet	Shipping Weight	Cord Attached
		1.8 oz.	2.5 oz.*								
Product Ratios											
LCA-2	34400.0001†	45:1-100:1	65:1-100:1	Scholle 1910LX	120	13.2	1700	125 cups/hr.	9.8	83 lbs.	Yes***
LCA-2	34400.0002†	25:1-45:1	25:1-65:1	Scholle 1910LX	120	13.2	1700	125 cups/hr.	9.8	83 lbs.	Yes***
LCA-2	34400.0003†	45:1-100:1	65:1-100:1	LiquiBox QC/D II	120	13.2	1700	125 cups/hr.	9.8	83 lbs.	Yes***
LCA-2	34400.0004†	25:1-45:1	25:1-65:1	LiquiBox QC/D II	120	13.2	1700	125 cups/hr.	9.8	83 lbs.	Yes***
LCA-2	34400.0025†	45:1-100:1	65:1-100:1	Scholle QC	120	13.2	1700	125 cups/hr.	9.8	83 lbs.	Yes***
LCA-2	34400.0026†	25:1-45:1	25:1-65:1	Scholle QC	120	13.2	1700	125 cups/hr.	9.8	83 lbs.	Yes***
†All models can be changed to these electrical configurations.					208	23.7	5000	385 cups/hr.	9.8	83 lbs.	No
					240	23.7	5800	512 cups/hr.	9.8	83 lbs.	No
LCA-2, PC	36500.0001†	45:1-100:1	65:1-100:1	Scholle 1910LX	120	13.2	1700	125 cups/hr.	9.8	83 lbs.	Yes***
LCA-2, PC	36500.0002†	25:1-45:1	25:1-65:1	Scholle 1910LX	120	13.2	1700	125 cups/hr.	9.8	83 lbs.	Yes***
LCA-2, PC	36500.0003†	45:1-100:1	65:1-100:1	LiquiBox QC/D II	120	13.2	1700	125 cups/hr.	9.8	83 lbs.	Yes***
LCA-2, PC	36500.0004†	25:1-45:1	25:1-65:1	LiquiBox QC/D II	120	13.2	1700	125 cups/hr.	9.8	83 lbs.	Yes***
LCA-2, PC	36500.0025†	45:1-100:1	65:1-100:1	Scholle QC	120	13.2	1700	125 cups/hr.	9.8	83 lbs.	Yes***
LCA-2, PC	36500.0026†	25:1-45:1	25:1-65:1	Scholle QC	120	13.2	1700	125 cups/hr.	9.8	83 lbs.	Yes***
†All models can be changed to these electrical configurations.					208	23.7	5000	385 cups/hr.	9.8	83 lbs.	No
					240	23.7	5800	512 cups/hr.	9.8	83 lbs.	No


*Unit shipped with dispense rate set at 1.8 oz./sec. Dispense rate increases to 2.5 oz./sec. if restrictor plug is removed.

Capacity measured with a 5 oz. cup. *Power cord (NEMA 5-15P) 15 Amp-120V machine only.

(30 Amp cord and plug needed for 208V and 240V models)

Electrical: 120V model requires 2-wires plus ground service rated 120V, single phase, 60 hz.

Plumbing: 20-90 psi (138-621 kPa) from a 3/8" (10 mm) or larger supply line. Unit requires a 2.2 gpm line flow capacity. A shut-off valve should be installed in the line before the unit. Install a regulator in line when pressure is greater than 90 psi to reduce pressure to 50 psi. Supplied with 3/8" (10 mm) male flare fitting.

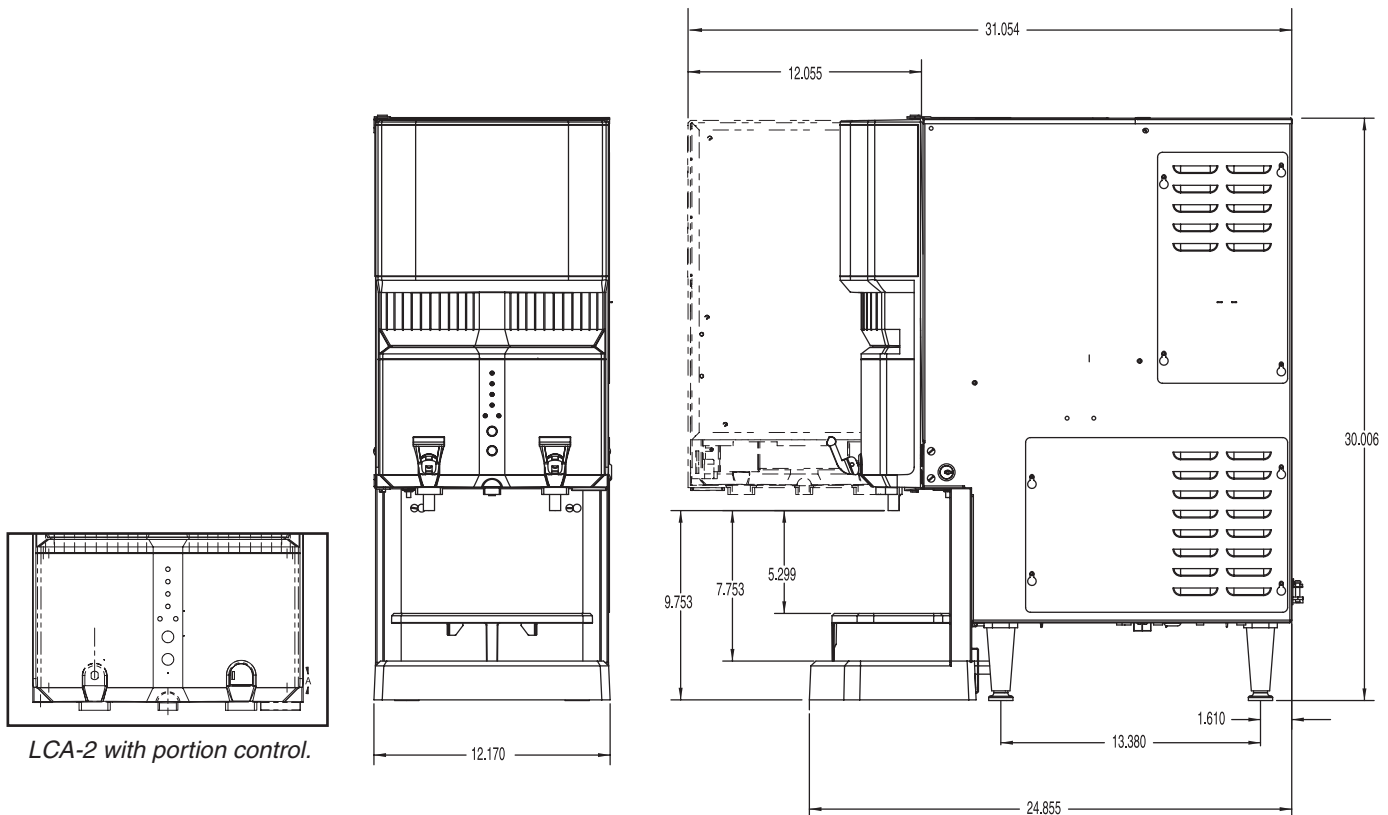

LCA-2 with portion control.